Fusion3

F200 3D Printer

UNPACKING YOUR F200

Revision 3/6/2026

UNPACKING YOUR F200

How to safely unpack your new printer.

Optional accessories and filament may be shipped in a separate box. Check your order confirmation for details.

1. Remove the top piece of cardboard that is taped to the top of the box.
2. Cut the bands holding the box to the micro pallet.

3. Slide the cardboard sleeve up and off. Initially it may be a little tight, so go slow at first.
4. After you get the sleeve up about 6 inches, your toolkit box and accessories may fall out of the sides.

5. The vertical foam pieces stay attached to the base. Remove any accessories packed around the printer. Remove the top foam blocks and any paperwork on top of the printer (picture shows an older packing method).

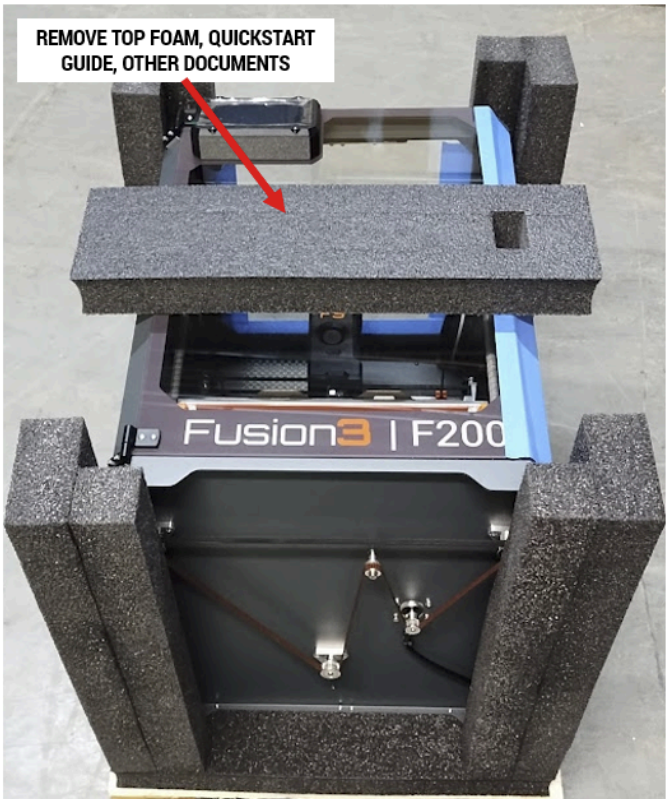

6. Carefully pick the printer up and stand it on its feet, then transfer it to a table or desk. You can either pick it up inside the foam cradle, or leave the foam cradle behind and pick up only the printer.

CAUTION: F200 weighs approx 50 lb. Consider having a second person help you pick up the printer.

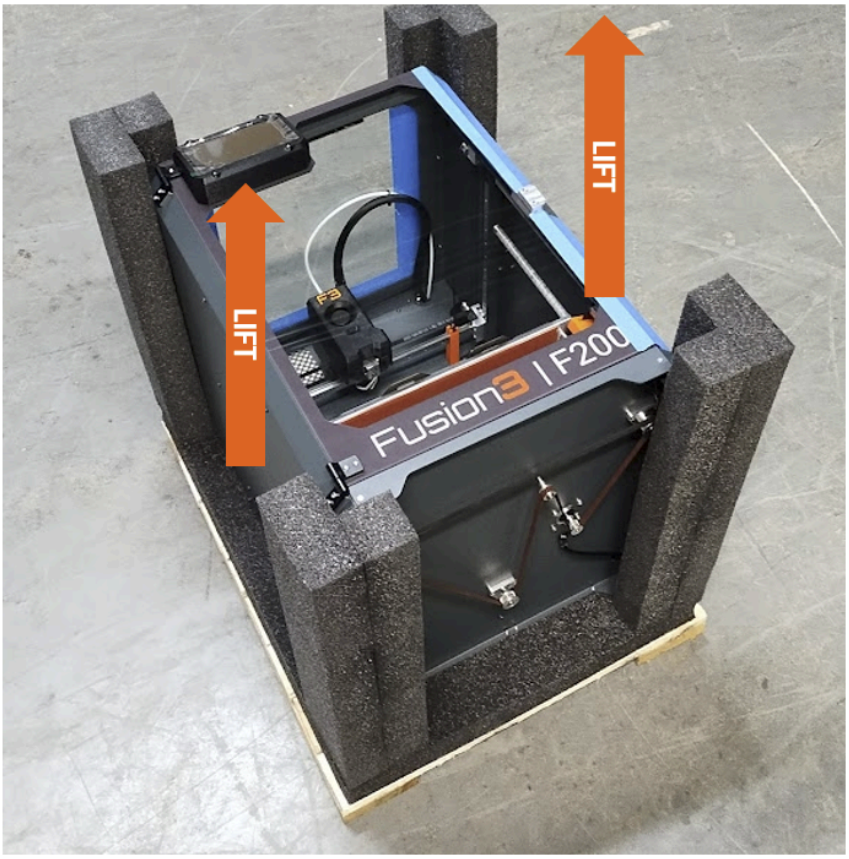

7. Remove the tape on the door and top window. Remove the front door shipping supports.

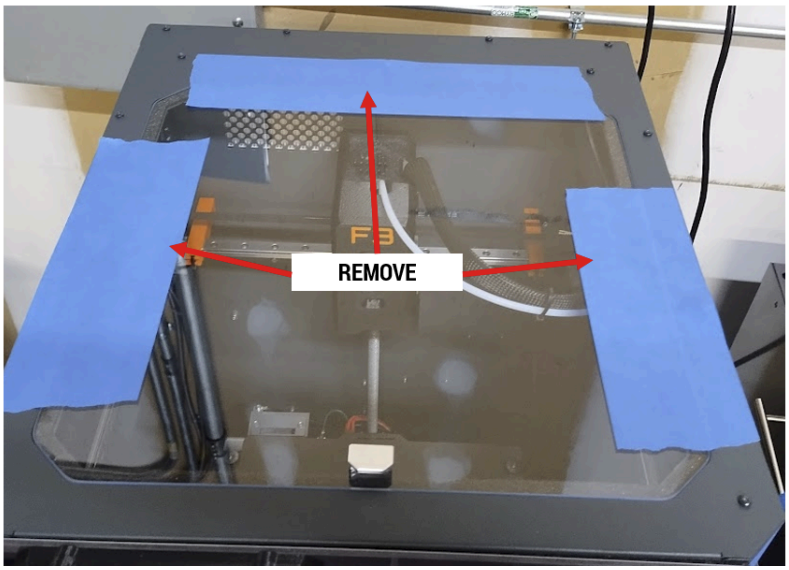

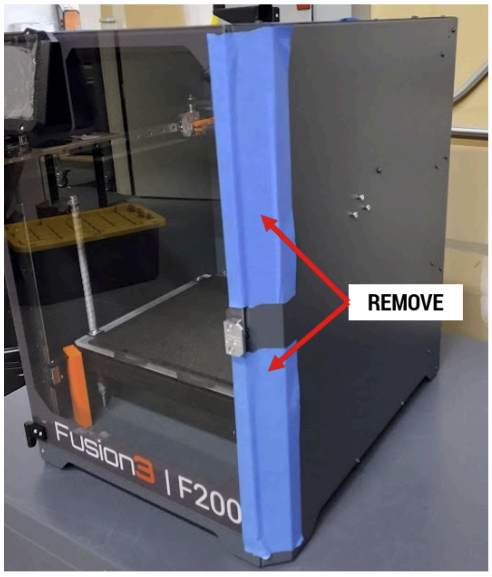

8. Your printer may ship with a protective plastic film on one side or both sides of the door. Remove this if you see it.

9. Open the door and remove the 4 internal supports: 2 on the Z axis and 2 on the X rail. These are orange.

    a. You may need to slightly raise the Z axis up using your hand to get the weight off the Z axis supports if they are difficult to remove.

    b. There is a zip tie to cut on both X rail supports.

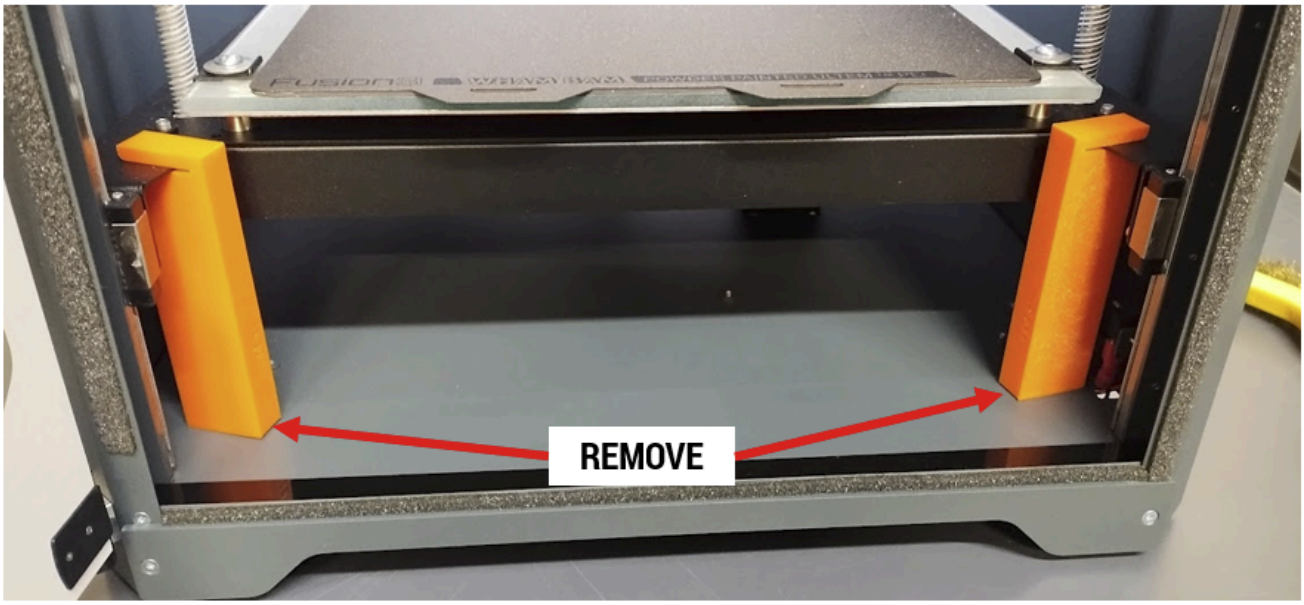

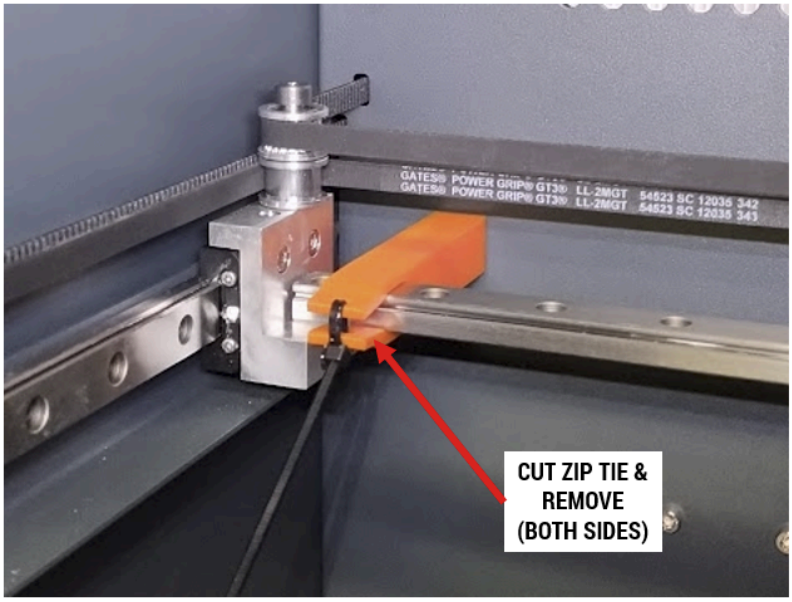

10. Inspect the printer for damage. If you find damage or have questions, please contact us!

Fusion3 Customer Support

https://www.fusion3design.com/contact-support/

support@fusion3design.com

877-452-0010 x2

11. Connect your power cord, power on, and run through the first run wizard that will check all basic functionality for you.